


Accelerating meta-atom design with optimization, inverse design and AI methods: an application oriented benchmark

Michael Pieters, Bavo Robben and Lieven Penninck
14th International Photonics and OptoElectronics Meeting,
Wuhan China




20 December 2022


Nano-scale design

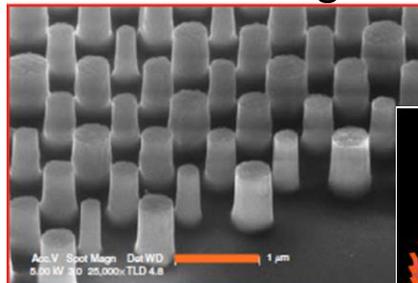

Component design

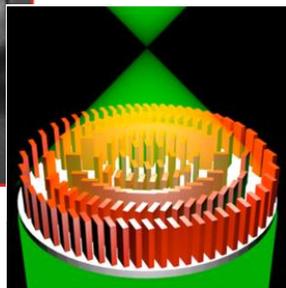

System Integration

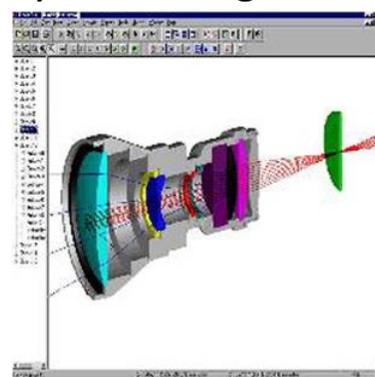

Planopsim's mission
Planopsim supplies R&D tools to engineers & scientists that allow to unlock the maximum benefit of flat optics in a user-friendly way.



Supported by:

imec istart



HORIZON EUROPE

With the support of

FLANDERS
INVESTMENT &
TRADE




FLANDERSINVESTMENT&TRADE.COM



AGENTSCHAP
INNOVEREN &
ONDERNEMEN


- ❖ Nano-structure full wave solution
 - All full wave algorithms scale poorly vs. DOF
 - Calculation times run into days to weeks easily
- ❖ Large area:
 - Memory limitations
 - Multi-scale methods increase the limit but require approximation
- ❖ Integration to system level
 - Link from wave to ray scale not well developed
 - Current models ignore higher order diffraction and amplitude

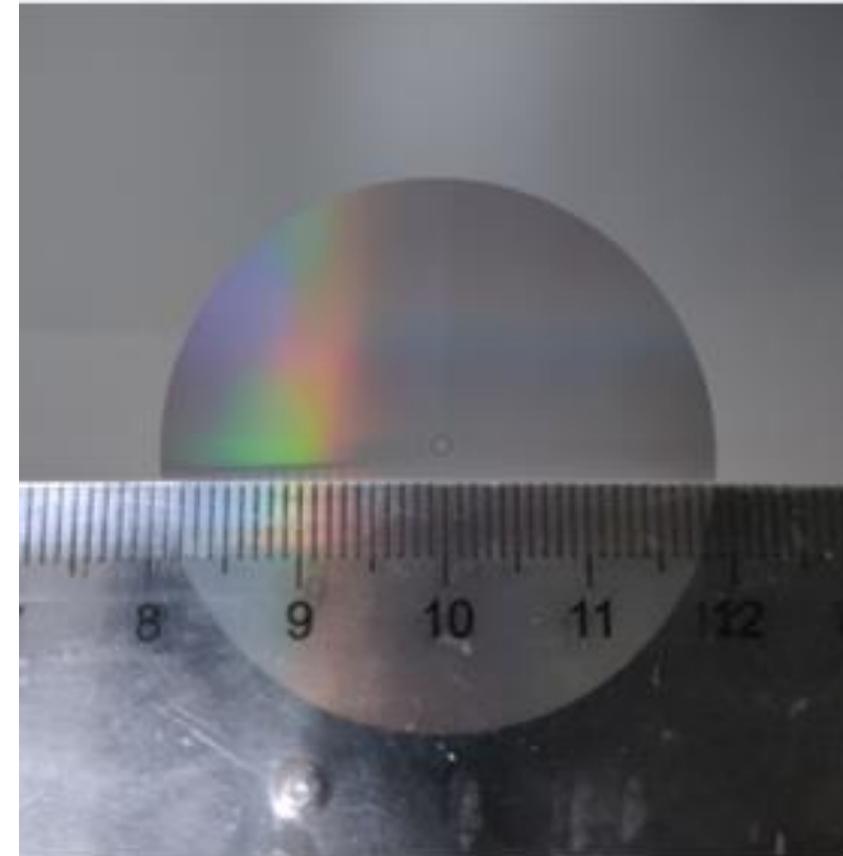

40mm diameter metalens


Example on-demand estimate for production (USD):*

- License server (t3.nano, 10 GB storage): \$5/month
- Compute instances (4 x c5n.18xlarge, 20 GB storage each): **\$11,360/month, \$16/hour**
- Shared storage (EFS, 1 TB usage): \$300/month

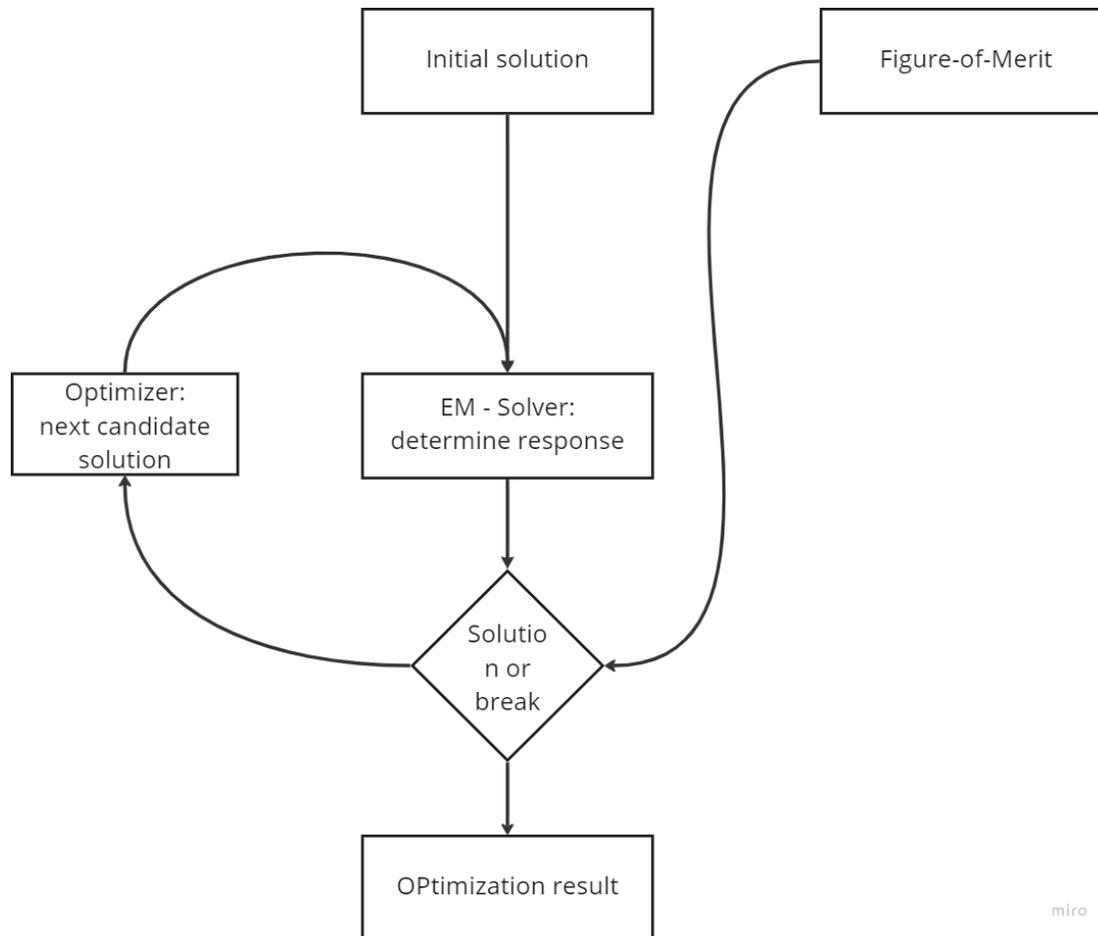


- ❖ Most time consuming aspect of design is the simulation of nano-structures
 - Typical: several **10 000s of structures**
 - Parametrized structures
 - Arbitrary shape structures
- ❖ Design contains a solver and an optimization loop
 - **Time spent = #calls x loop time**
 - Loop time determined by EM solver
- ❖ Two approaches to speed up:
 - Reduce #calls: smartest optimization algorithm
 - Reduce loop time: fastest solver
- ❖ “Orthogonal” approaches can be combined

miro

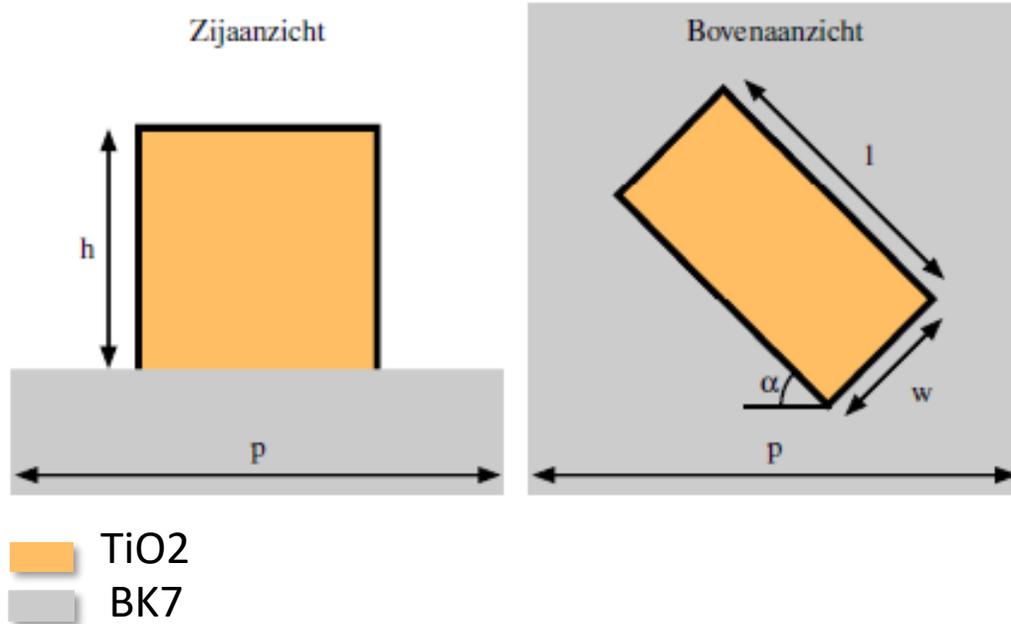

- ❖ Reference problems:
 - Optimization of Pancharatnam Berry phase structures
- ❖ Standard design approach
 - Library of 32 structures
 - Fixed height and unit cell
 - TiO2 on glass
 - Wavelength 633nm
 - Period: 430nm
- ❖ Benchmark:
 - Brute force parameter sweep
 - Particle Swarm Optimization
 - Genetic Algorithm
 - Differential evolution
 - Covariance Matrix Adaptation Evolution Strategy
 - Bayesian optimization

Current position of population

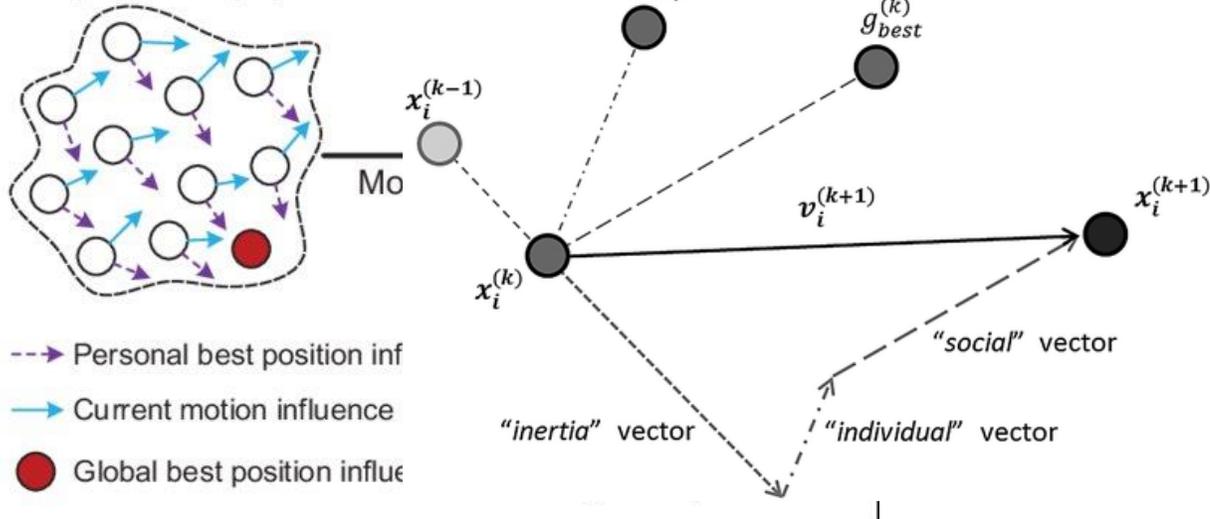



Particle swarm optimization (PSO)

- ❖ Multiple starting points
- ❖ Direction of particle controlled by:
 - Best solution of all particles
 - Best position of individual particle
 - Momentum of individual particle

Bayesian Optimization


- ❖ Constructs a polynomial approximation of the error landscape from previous iterations
- ❖ Analytical solution of approximate polynomial error landscape

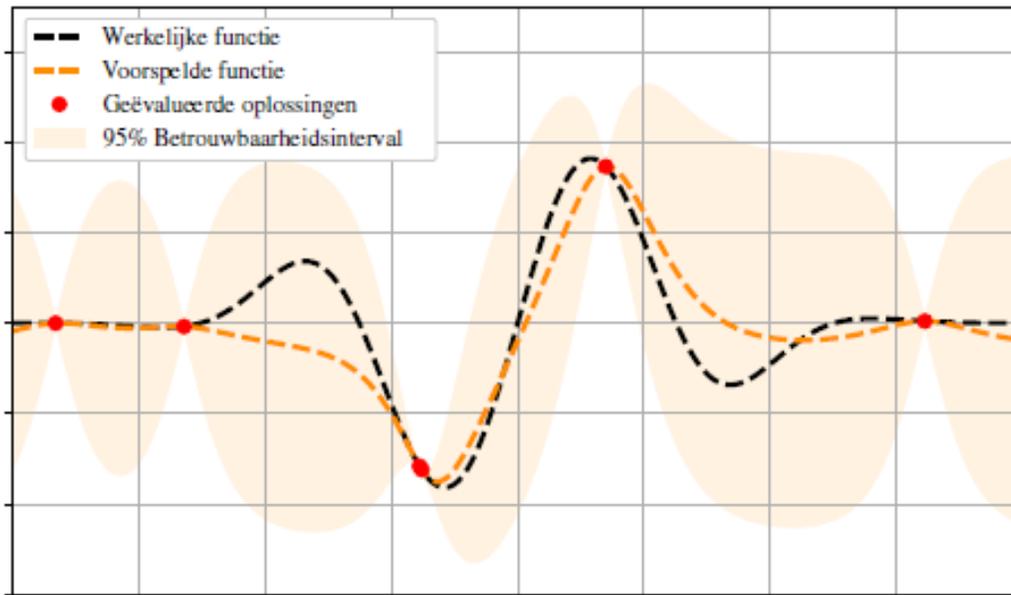

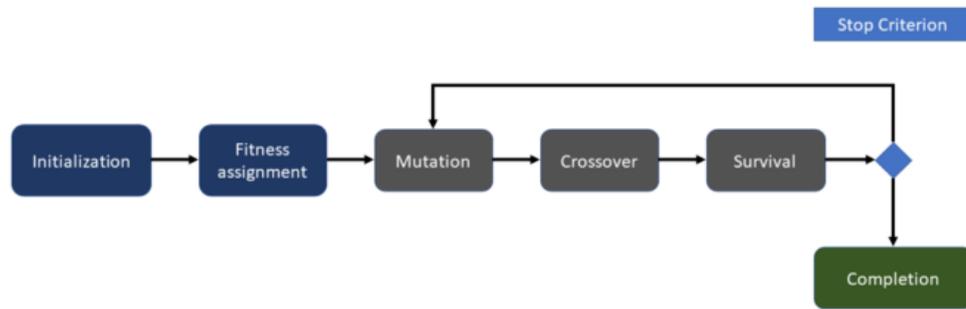

Genetic algorithm (GA) and Differential evolution (DE)

- ❖ Multiple starting points (population)
- ❖ Evolution over multiple iterations
 - Best solutions kept
 - Best solutions are changed by :
 - Cross-over
 - Random mutation

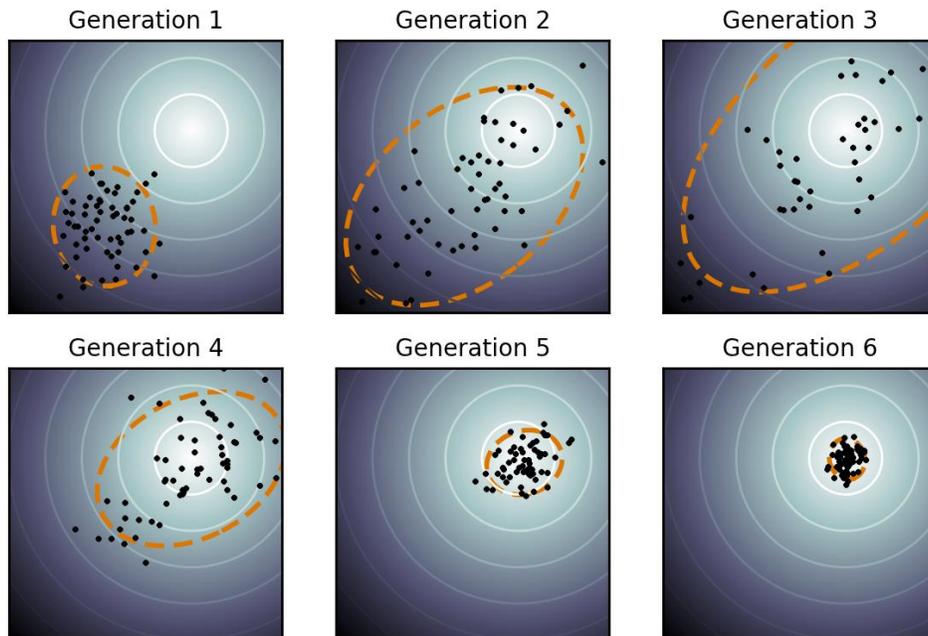



Covariance Matrix Adaptation Evolution Strategy (CMAES)

- ❖ Sampled solutions via normal distribution
- ❖ Evolution over multiple iterations
 - Best solutions kept
 - Search area expanded/decreased based on rate of change





Benchmark results

- ❖ Pancharatnam Berry structure optimization
- ❖ Convergence reached in 400-1500 solver calls
- ❖ Error defined as $\varepsilon = |t - t_{target}|$

Algorithm	Final error	#calls to converge
Bayes	0,066	485
PSO	0,086	509
DE	0,0878	917
GA	0,126	1123
CMAES	0,133	245

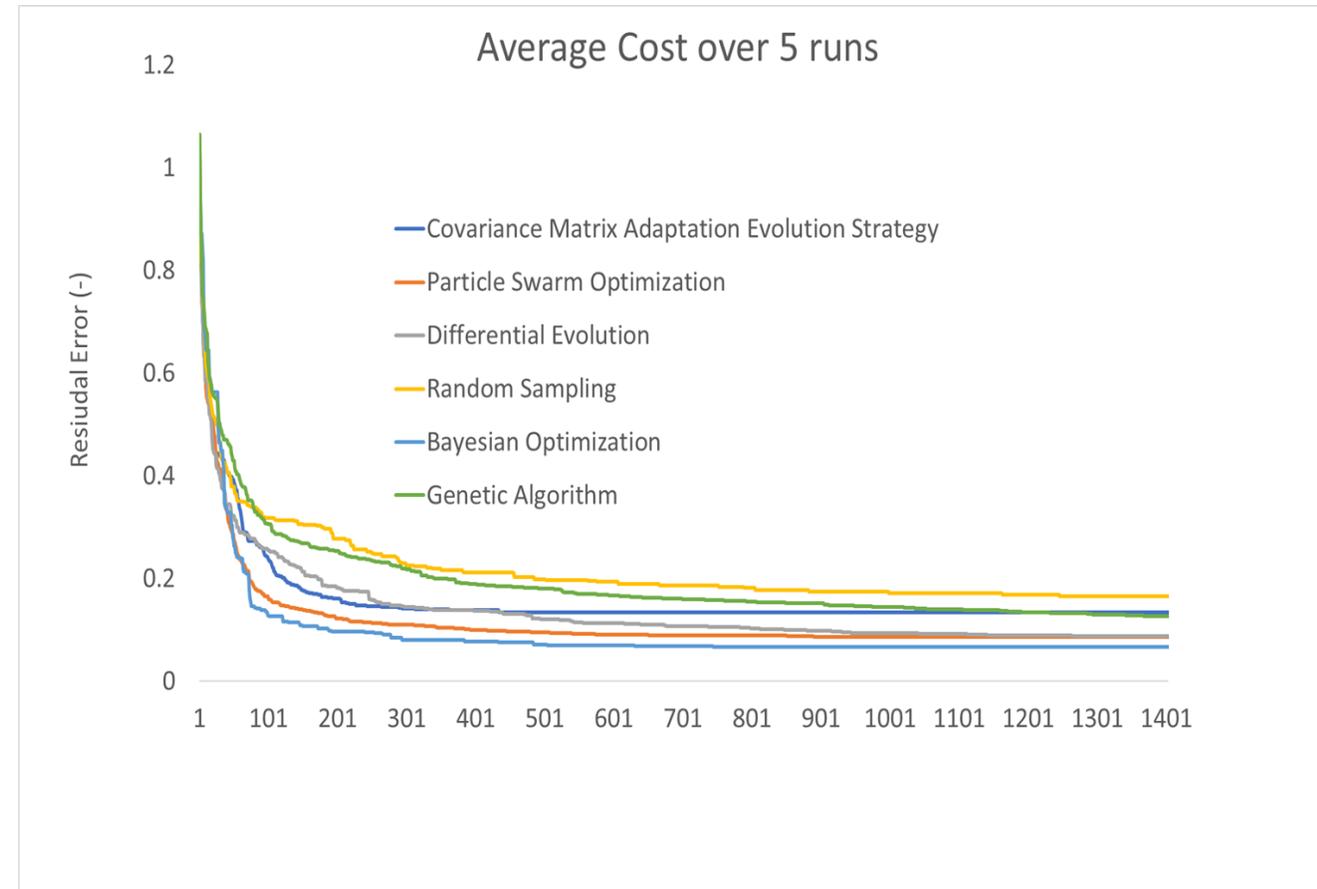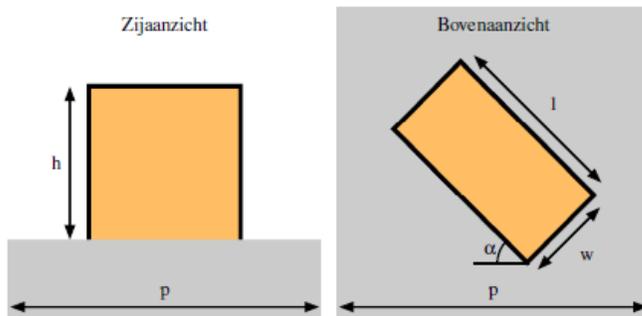

Adjoint optimization

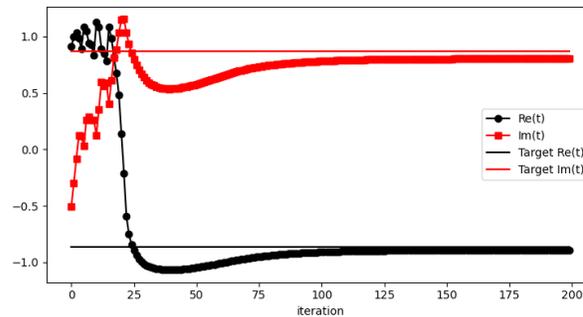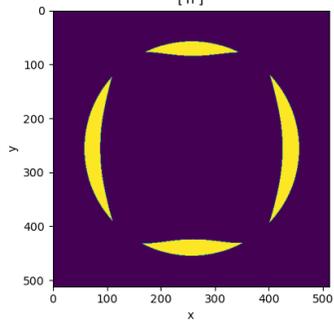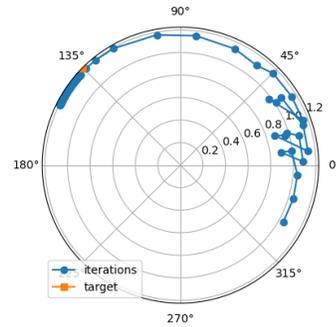
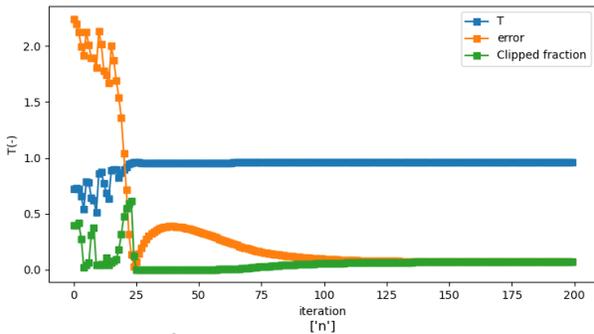


- ❖ Adjoint optimization
 - 2 solver calls per optimization
 - Gradient descent optimization
- ❖ Needs post-processing for:
 - Binary material distribution
 - Realistic feature sizes
- ❖ Post processing limits convergence and final result


Algorithm	Final error	#calls to converge
Adjoint Optimization	0,05	200
Bayes	0,066	485
PSO	0,086	509
DE	0,0878	917
GA	0,126	1123
CMAES	0,133	245

Surrogate solver

- ❖ Neural networks trained to predict RCWA solver answers
 - Reflected and transmitted phase and amplitude
 - Fundamental order (00)
- ❖ Physical parameters
 - Period P
 - Height H
 - Radius r
 - TE/TM
 - λ : 450-700nm

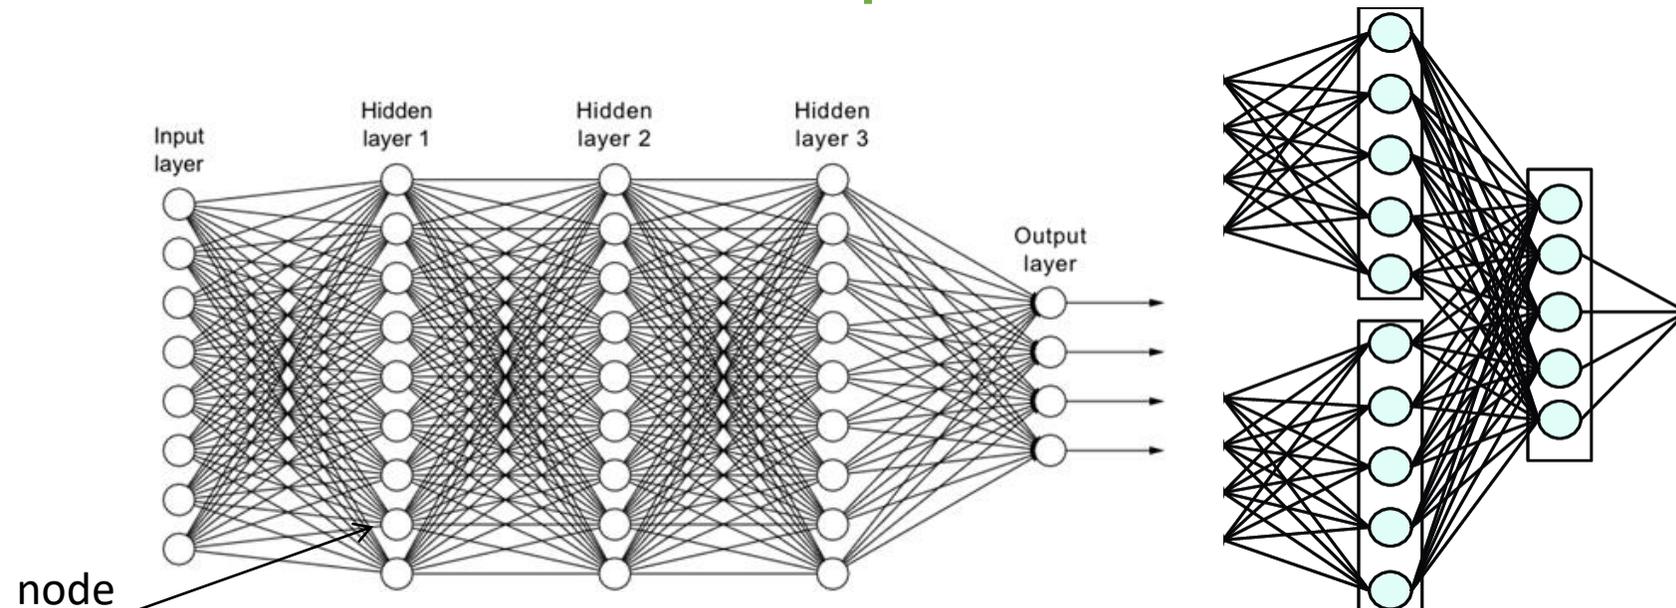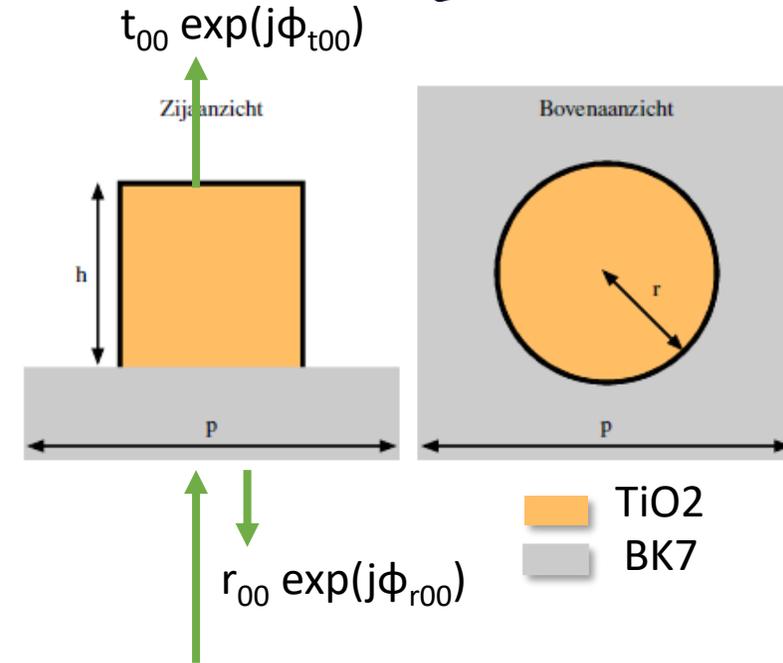

Surrogate NN results: example result


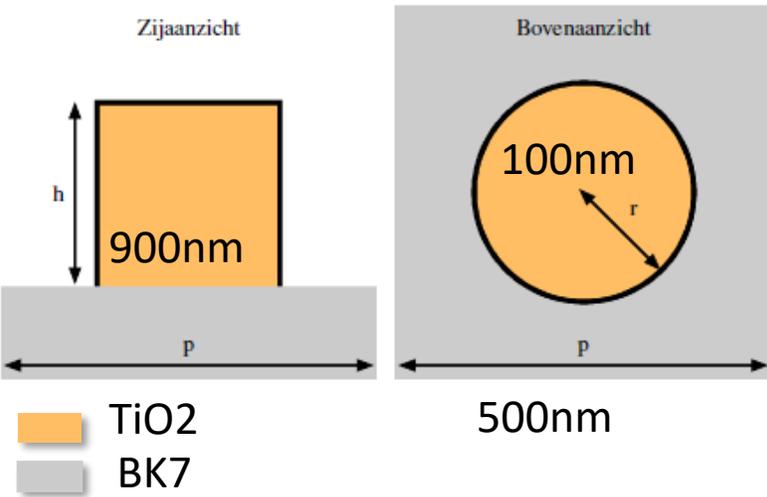


- ❖ DNN reproduces transmission and reflection
- ❖ Amplitude and phase reproduced
- ❖ Error metric: Euclidian distance



$$SE_{r/t} = |r/t_{NN} - r/t_{RCWA}|^2$$

Direction	MSE	Mean Error
Transmission	7,2 10 ⁻⁵	0,85%
Reflection	5,6 10 ⁻⁵	0,75%


Transmission

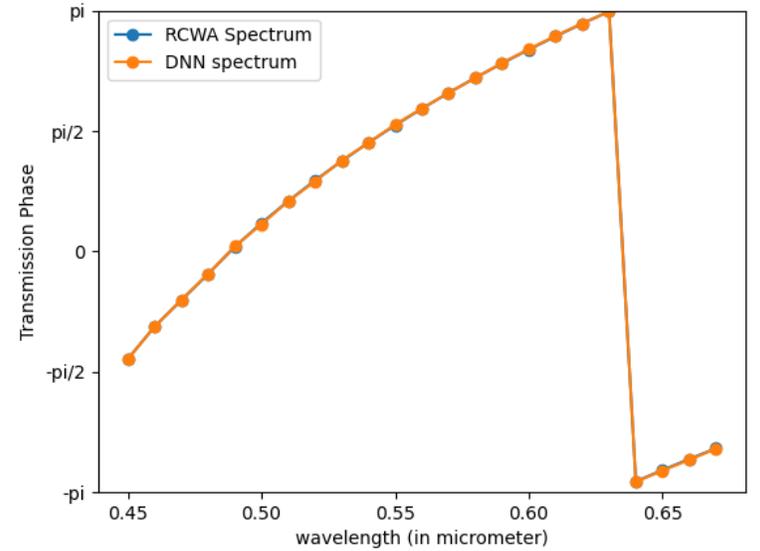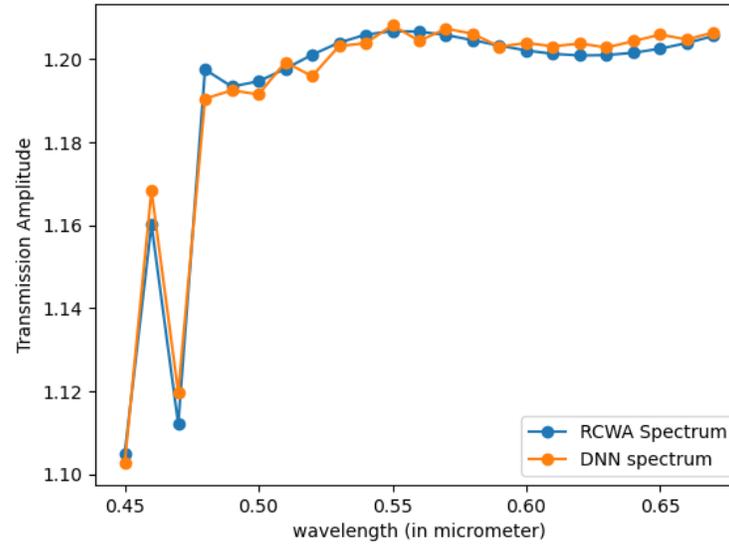

Reflection

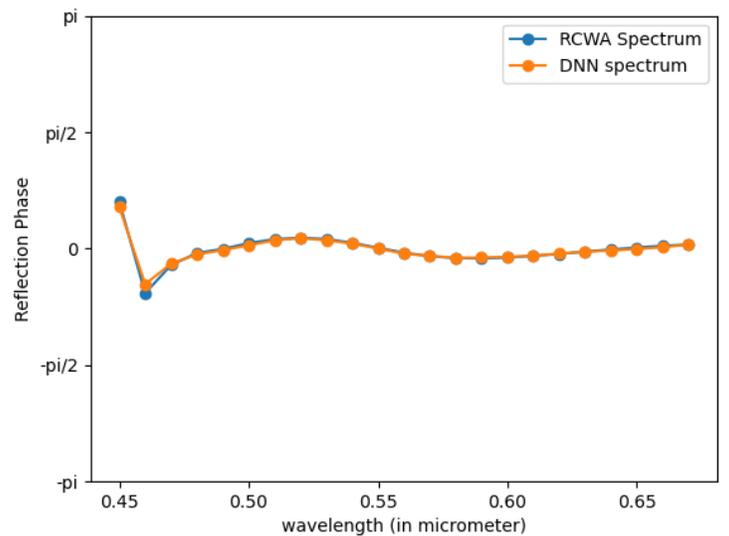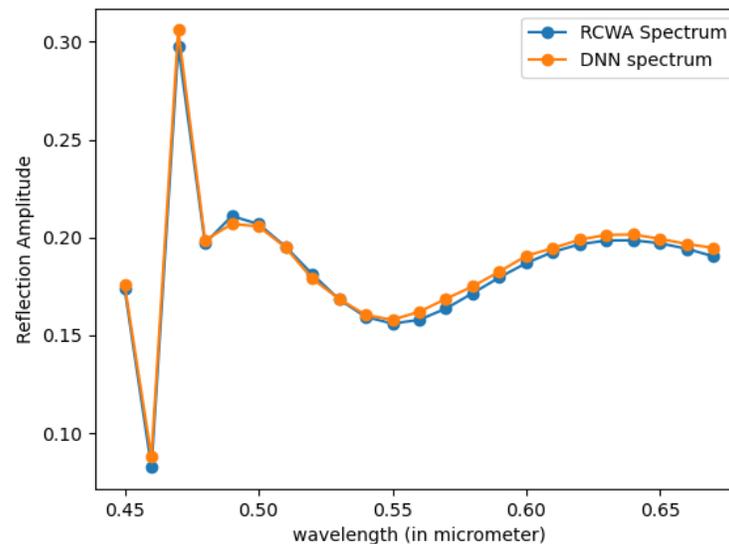

MSE for Transmission after 5000 epochs
Activation function: relu

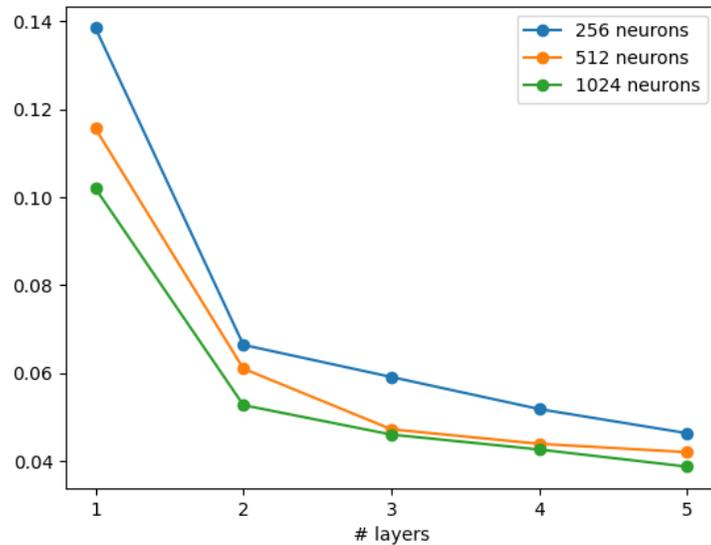

❖ Sufficient network complexity needed

- Layers
- Neurons per layer


❖ Neural Network types:

- Fully connected layers
- Shared layer network
- Neural tensor layer
- #nodes and # layers optimized


❖ Training data:

- Large amount : 14
- Representative sar


MSE for Transmission after DNN optimization for 1000 epochs

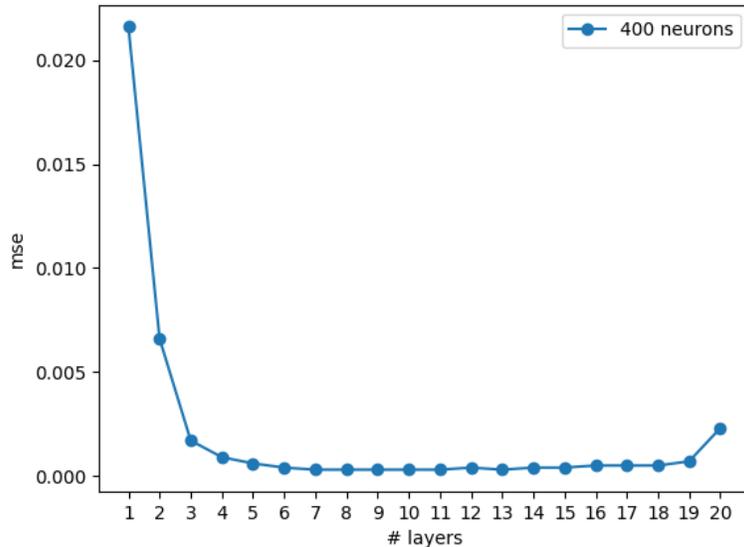

MSE for Transmission after DNN optimization for 1000 epochs

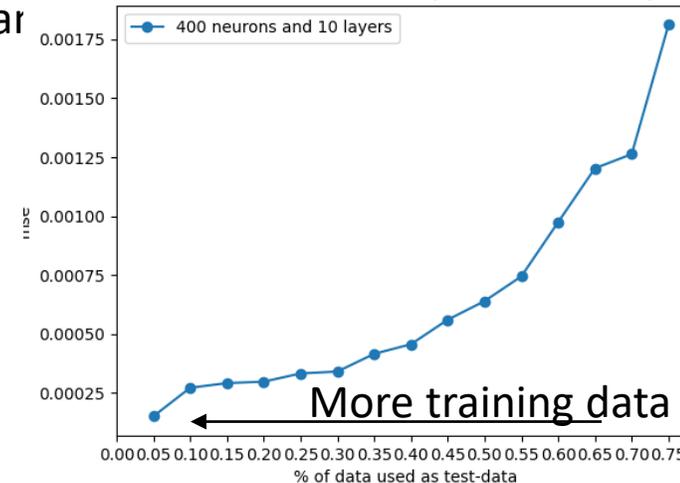

But is it faster?

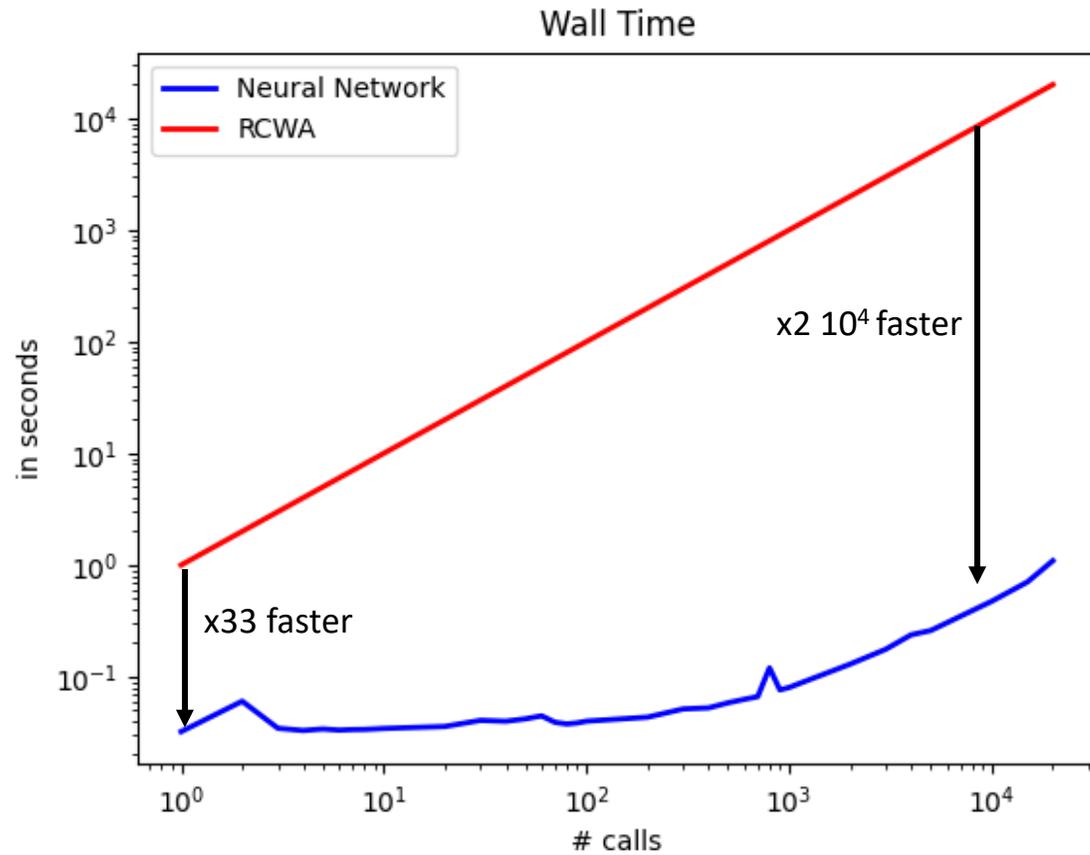


- ❖ Surrogate NN is 33 – 20 000 times faster than direct RCWA call
- ❖ 1 call (0,033s) 33x faster
- ❖ 9000 parallel calls (0,44s) -> 20 000 times faster

Surrogate solver + optimization

- ❖ Search via genetic algorithm combined with surrogate solver
- ❖ Direct implementation: 31sec
- ❖ Optimized for large batches: 4,5sec


Successful optimization

Target (blue) vs Optimization (green)

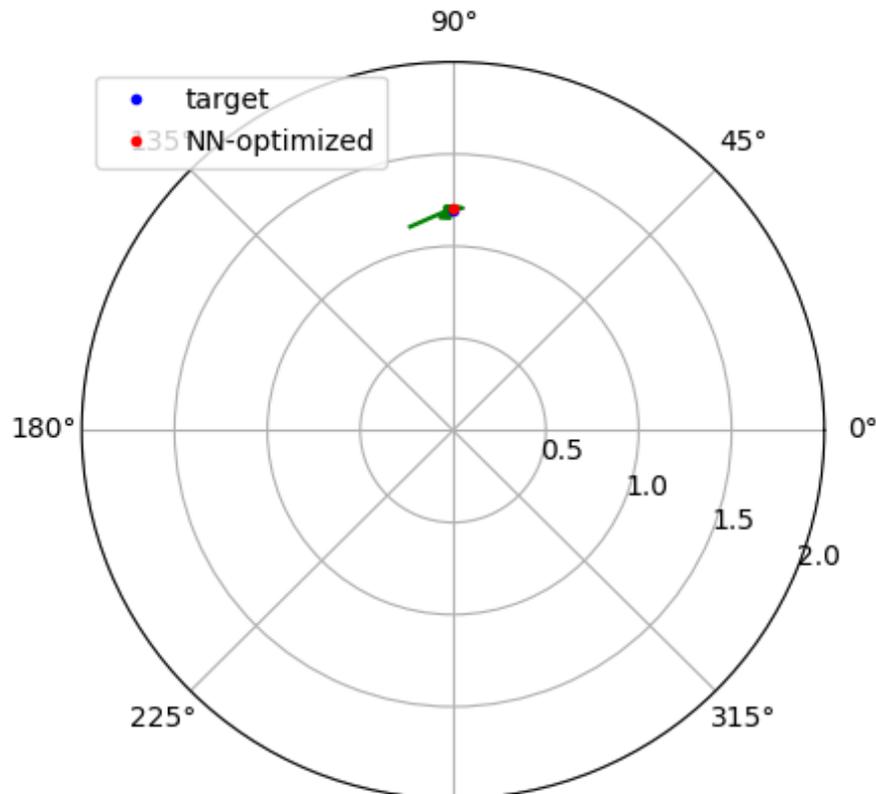

Unsuccessful optimization

Target (blue) vs Optimization (green)

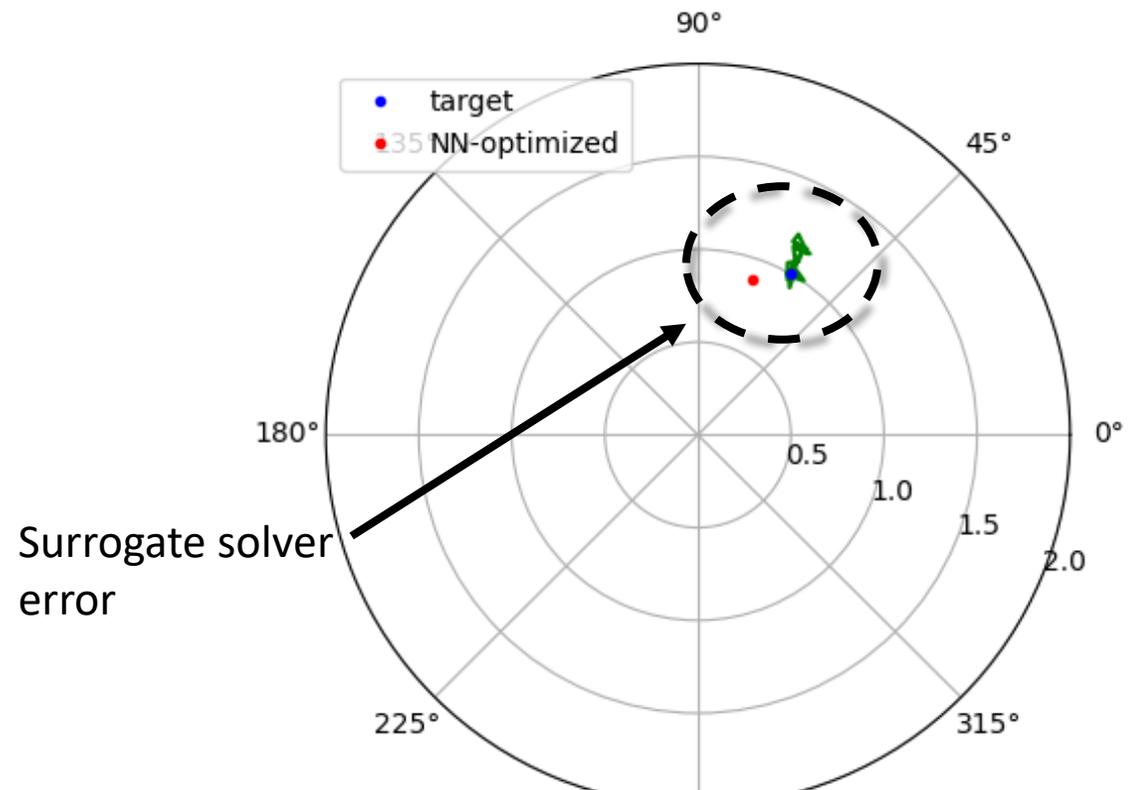

- ❖ **Surrogate solver and optimization methods** can be used to **speed up** meta-atom design **up to 500 fold**
- ❖ **PSO, Bayesian and adjoint** method are **most performant optimization** algorithms
- ❖ Surrogate needs a pre-trained and accurate network. **Training takes more time** than a **classical design**.
- ❖ Surrogate only applicable to pre-defined material platform (substrate + material)

	#solver calls	Time per call	Total calculation time	Acceleration factor
Brute force sweep	64 000	1.1s	19.55hr	1 (baseline)
Parameter optimization (Bayesian)	32 000	1.1s	8.9hrs	2
Neural network training	400 000	1.1s	122hrs	0.16
Brute force pre-trained surrogate	64 000	0.03s	0.53hrs	37
Genetic + pre-trained surrogate	32 000	0.03s	0.27hrs	72
Brute force pre-trained surrogate	32 000	0,005s	0,04hrs (3mins)	488

Reach us here!



www.planopsim.com



lieven.penninck@planopsim.com

Supported by:



AGENTSCHAP
INNOVEREN &
ONDERNEMEN

